

FDU™

Fluid Distribution Unit



Features

- Independent pressurised fluid supply system
- Capable of supporting multiple seals
- Optional pressure switch and accumulator
- Reduced energy consumption

Benefits

- Removes the expense of piping a pressurised clean water / oil supply to a new area of the plant
- Removes the expense of purchasing one system per seal
- Enables greater control of water / oil ring main pressure
- The system can be operated intermittently to reduce energy costs via dead-ended piping



The FDU™ system can be operated in two distinctive formats. It can be utilised as a traditional plan 54 system or as an auto top up ring main for AESSEAL® water management systems.

The FDU™ system is capable of acting as a fluid ring main system, providing cool barrier fluid to multiple independent seal support systems. This means that the AESSEAL® water management system principle can be applied without the need for a water ring main. The FDU™ ring main system allows the water management systems to be set at the desired operating parameters for the applications, regardless of differences in equipment operating pressures. The FDU™ is available with a number of modular options to suit a wide range of industrial applications where the quality or availability of a closed loop water / oil supply ring main is in question. This system can also be set up as a dead-ended system and run intermittently to save energy costs. (see Figure 1)

The AESSEAL FDU™ is also designed to deliver a reliable and consistent high volume of cooling fluid for mechanical seal support applications. As the FDU™ operates in a closed loop environment with the mechanical seal it provides significant water savings over conventional gland packing or single mechanical seal applications using a Quench, Flush and Drain arrangement. This is especially advantageous when used on large diameter, high shaft speed, double mechanical seal applications as found in the Mining Industry. (see Figure 2)

Specifications

Fluid Storage Tank Capacity: 180 litres (48 US gals), unpressurised

Fluid Storage Tank Material: Stainless Steel

Circulation Pump: Centrifugal Pump, 16 bar (232 psi) rated

Barrier Fluid Media: Water or Oil*

Optional Extras: Can be supplied with an accumulator and / or standby circulation pump, depending on the critically of the application.

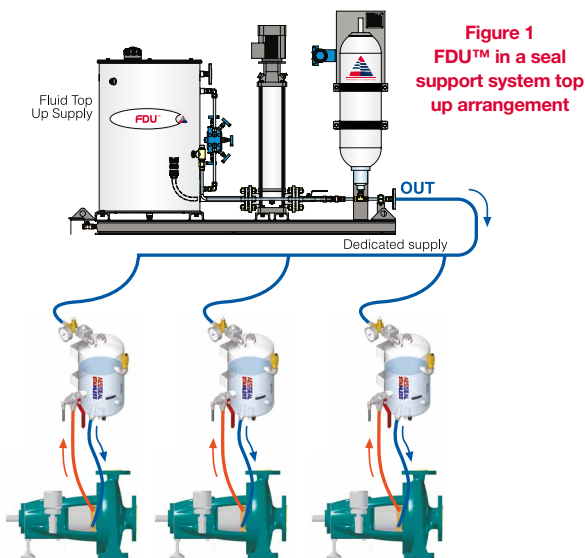


Figure 1
FDU™ in a seal support system top up arrangement

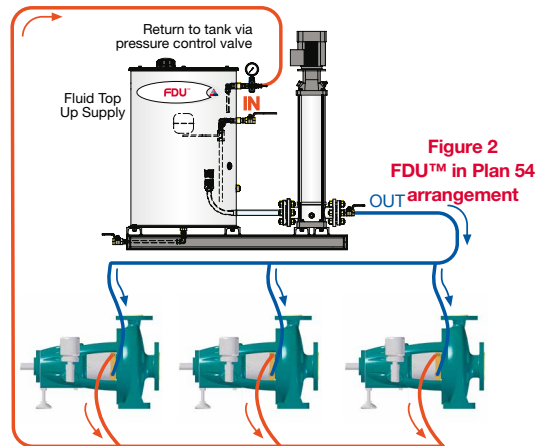


Figure 2
FDU™ in Plan 54 arrangement

The diagram to the left illustrates how the FDU™ can supply multiple seal support systems. The diagram above illustrates how the FDU™ can supply multiple seals in a closed loop operation.

*Oil can only be used with the appropriate seal supply system. Please contact systems technical for further advice.

For further information and safe operating limits contact our technical specialists at the locations below.



Use double mechanical seals with hazardous products.

Always take safety precautions:

WARNING

- Guard your equipment
- Wear protective clothing

UK Sales & Technical advice:

AESSEAL plc
Mill Close
Bradmarsh Business Park
Rotherham, S60 1BZ
United Kingdom
Tel: +44 (0) 1709 369966
Fax: +44 (0) 1709 720788
E-mail: seals@aessecal.com

Distributed by:

'Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.'



USA Sales & Technical advice:

AESSEAL Inc.
355 Dunavant Drive
Rockford,
TN. 37853
USA
Tel: +1 865 531 0192
Fax: +1 865 531 0571
E-mail: usa@aessecal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AESSEAL plc, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.